

ATA 25 High Pressure Regulator

Fangaz ATA serial high pressure regulator,

- ☐ It is available to use in medium and low output pressure.
- ☐ Double adjustment head designed for pressure adjustment (coarse and fine adjustment).
- ☐ With security shut-off,
- ☐ Membrane, supported from below and above for longevity,

Type of Gas Used;

- ☐ Natural gas, filtered and not dry and aggressive,
- ☐ Other gases not mix. LPG, propane and corrosive,

Technical Features;




Pemax 19 bar,
 Input pressure range (bpe) 4 - 19 Bar
 Output pressure range (Wh) 0,15 - 2 Bar
 Output pressure sensitivity class (RG) 10%
 Shut-off pressure sensitivity class (SG) 20%
 Operating temperature 20 + 60°C
 With thread 1"-1½" ISO

Security shut-off system;

Minimum and maximum adjusted security shut-off system;
 Optional, electric warning sensor

Output Pressure Options;

Class 1: 0,15- 2 bar

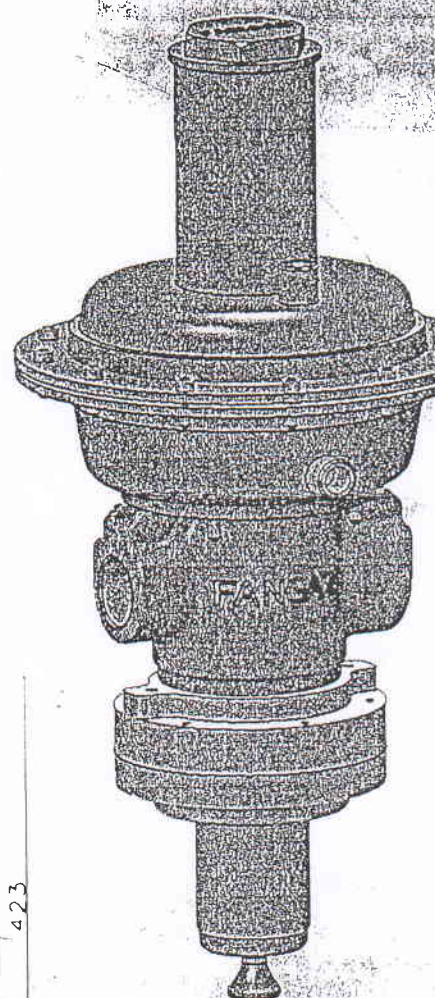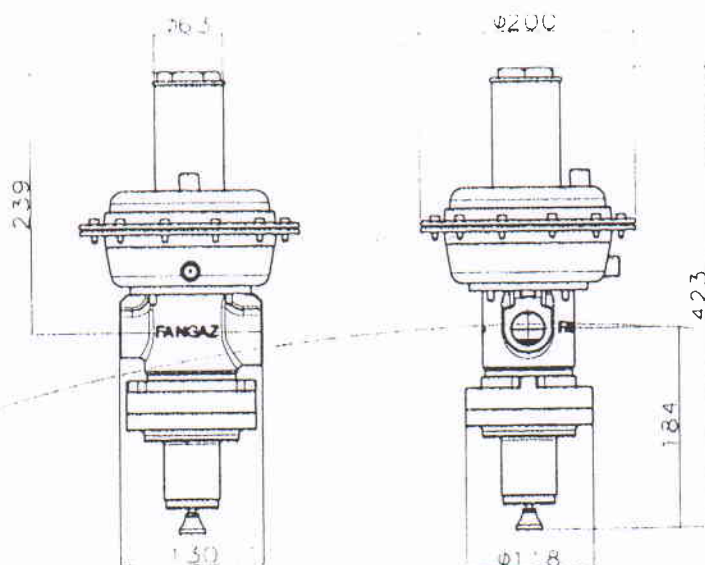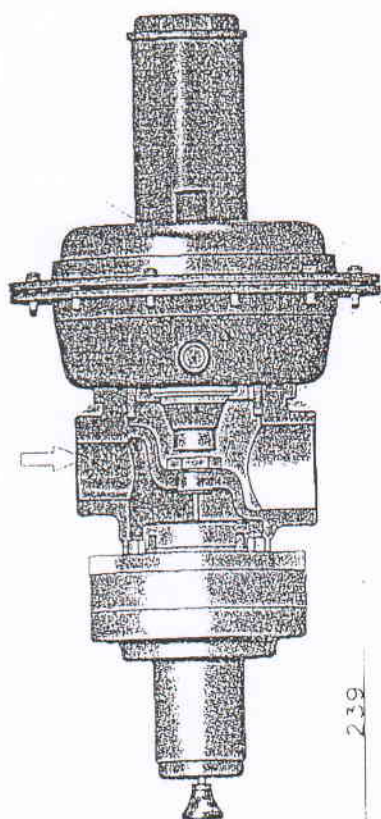

ATA 25/40- Capacity Table

Inlet Pressure Pa (bar)	Outlet Pressure Pa (bar)							
	0.15	0.3	0.5	1	1.5	2	3	4
0.5	99	77						
1	154	154	132					
2	242	275	275	220				

Maintenan
 Assemb
 Garant