

თელავის ავტოფარეხი

Partner for Contact:
Order No.:
Company:
Customer No.:


Date: 28.06.2016
Operator:

Table of contents

თელავის ავტოფარეხი	
Project Cover	1
Table of contents	2
Luminaire parts list	3
PHILIPS BGP322 T35 1xECO45-3S/657 DN	
Luminaire Data Sheet	4
Наружная сцена 1	
3D Rendering	5
False Colour Rendering	6

თელავის ავტოფარები / Luminaire parts list

28 Pieces PHILIPS BGP322 T35 1xECO45-3S/657 DN
 Article No.:
 Luminous flux (Luminaire): 4368 lm
 Luminous flux (Lamps): 4800 lm
 Luminaire Wattage: 39.0 W
 Luminaire classification according to CIE: 100
 CIE flux code: 47 80 98 100 92
 Fitting: 1 x ECO45-3S/657 (Correction Factor 1.000).




PHILIPS BGP322 T35 1xECO45-3S/657 DN / Luminaire Data Sheet



Luminaire classification according to CIE: 100
CIE flux code: 47 80 98 100 92

Luminous emittance 1:


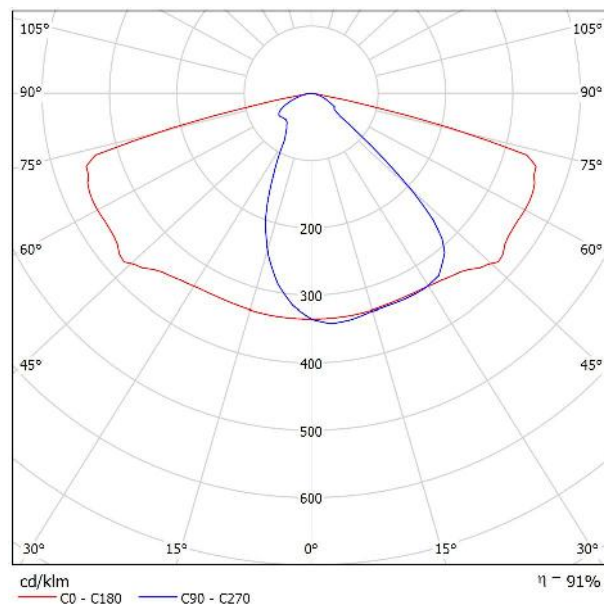


Due to missing symmetry properties, no UGR table
can be displayed for this luminaire.

Planning data

Luminaire Arrangements

Maintenance factor: 0.67

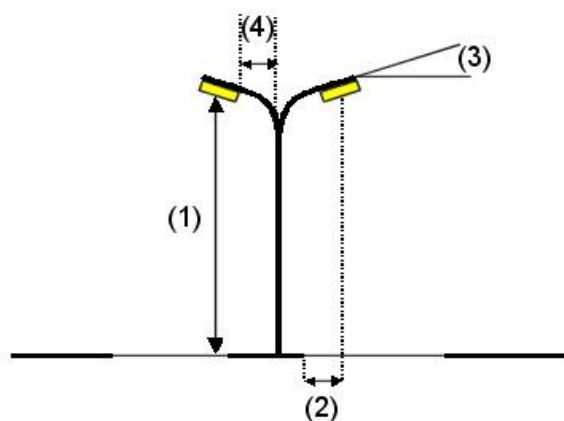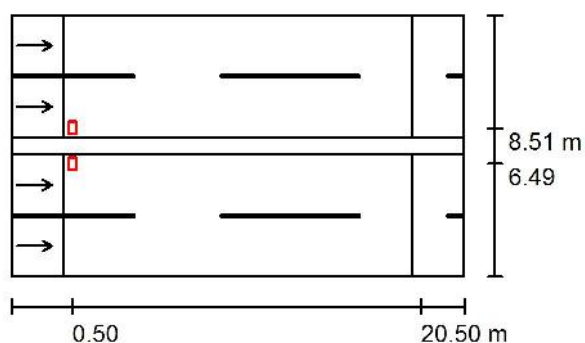


Luminaire: PHILIPS BGP322 T35 1xEco45-3S/657 DN
 Luminous flux (Luminaire): 4368 lm
 Luminous flux (Lamps): 4800 lm
 Luminaire Wattage: 39.0 W
 Arrangement: on Median
 Pole Distance: 20.000 m
 Mounting Height (1): 7.126 m
 Height: 7.000 m
 Overhang (2): 0.500 m
 Boom Angle (3): 15.0 °
 Boom Length (4): 1.012 m

Maximum luminous intensities
 at 70°: 754 cd/klm
 at 80°: 220 cd/klm
 at 90°: 14 cd/klm



Any direction forming the specified angle from the downward vertical, with the luminaire installed for use.

Arrangement complies with glare index class D.6.



Наружная сцена 1 / 3D Rendering

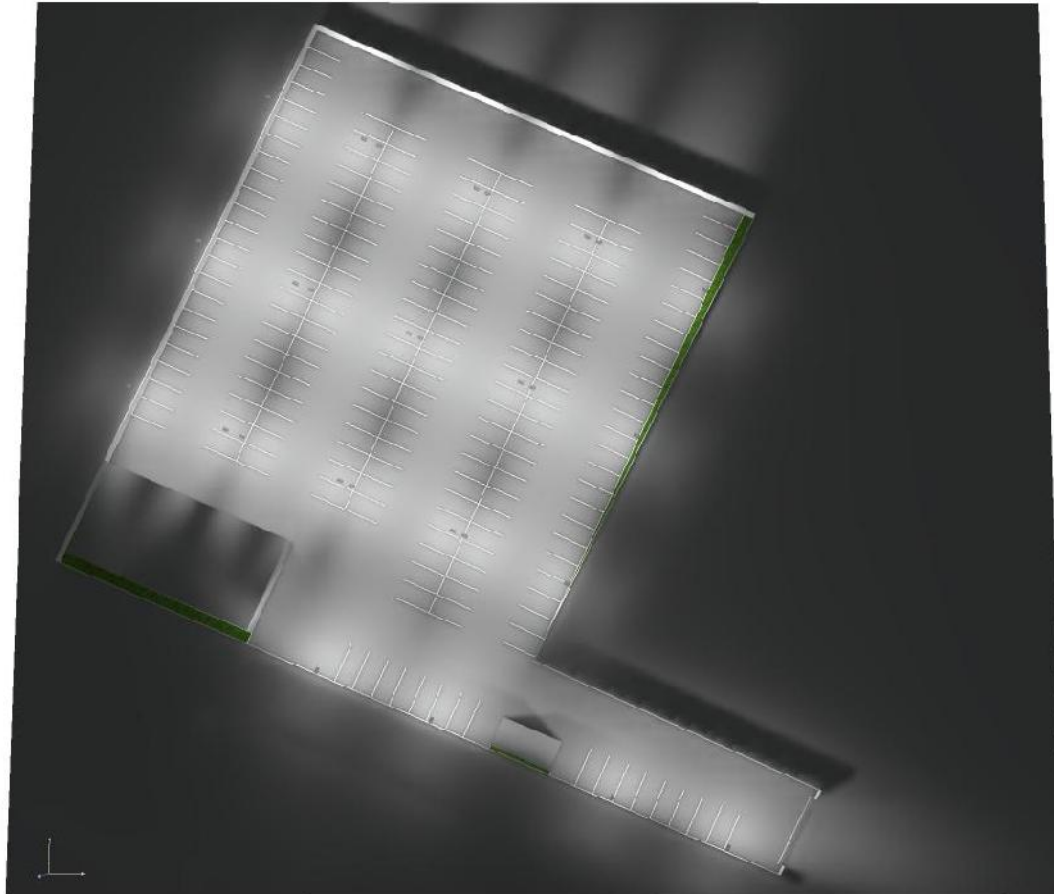

Наружная сцена 1 / 3D Rendering

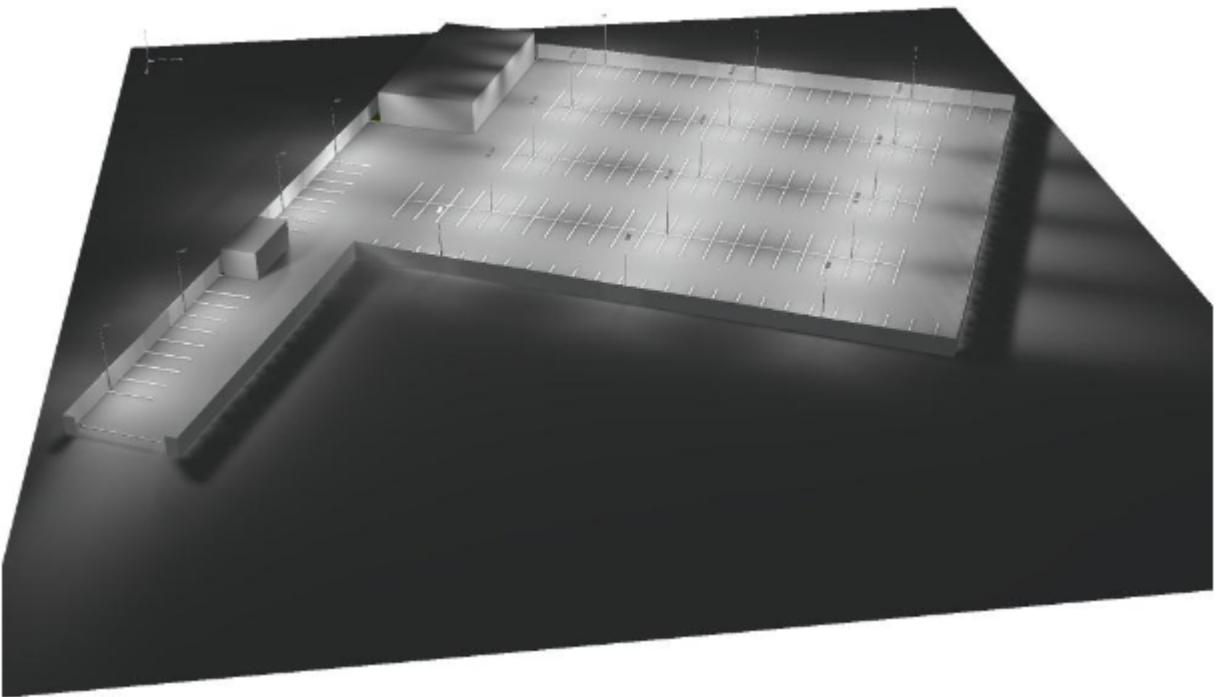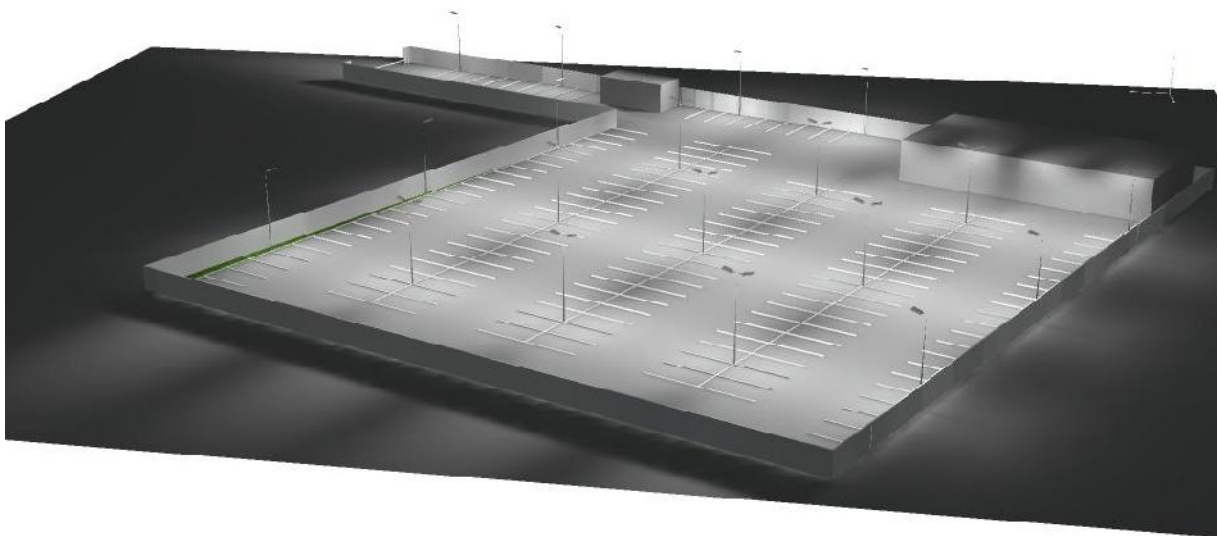

Наружная сцена 1 / False Colour Rendering

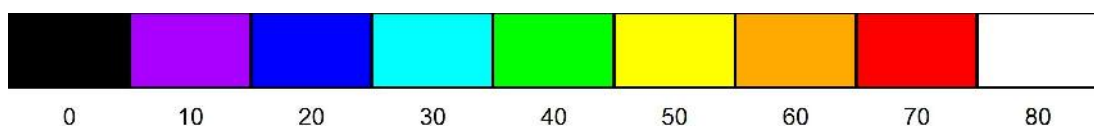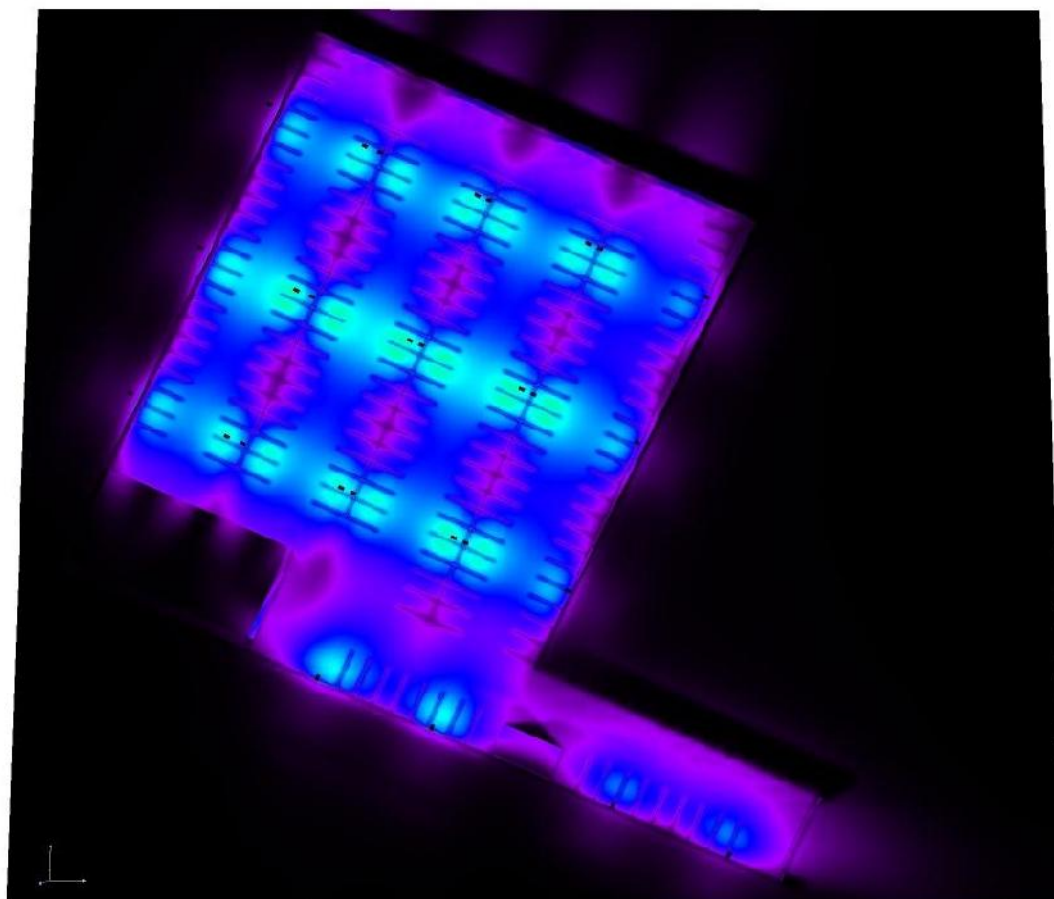

lx