

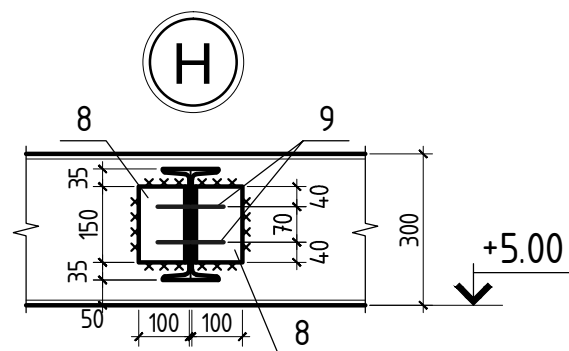
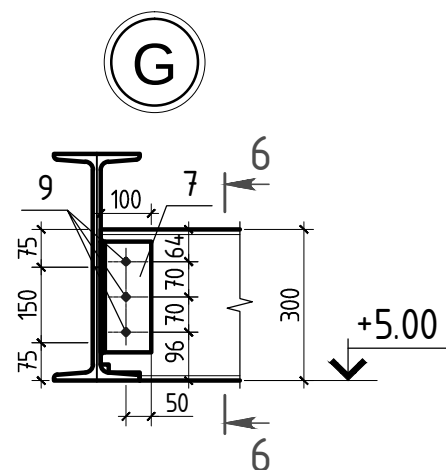
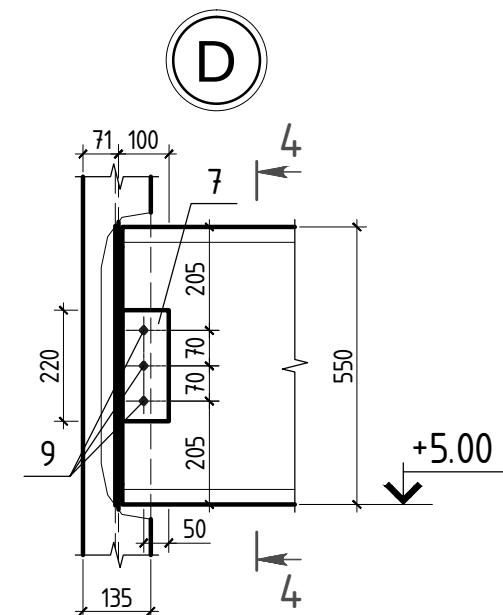
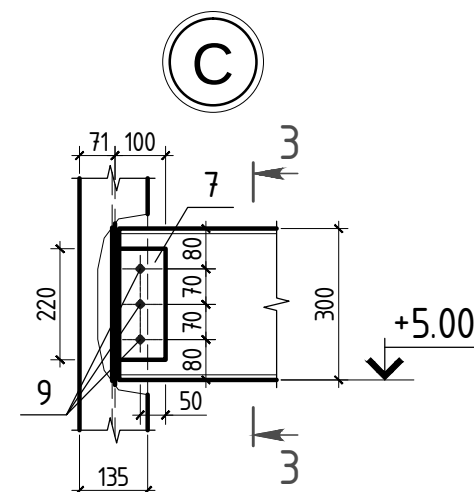
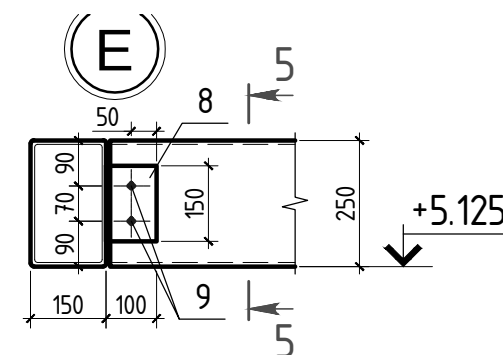
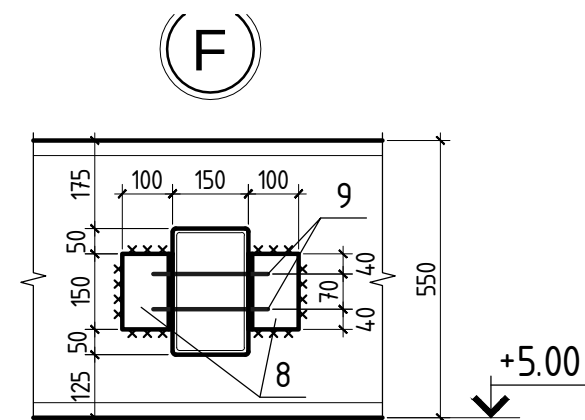
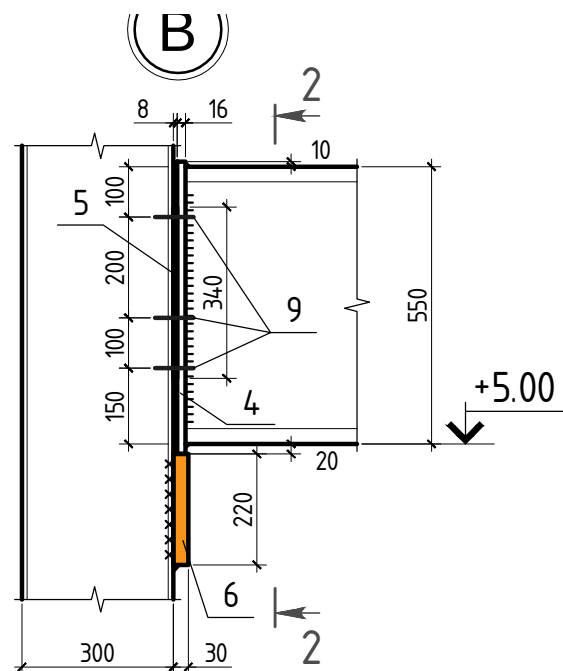


სავსიფიკაცია ლითონის შეაკრავი კოჭების კვანძებისათვის

პოზ.	აღნიშვნა	დასახელება	რაოდ.	შენიშვნა
		<u>ლითონის ელემენტები</u>		
		<u>დატალები</u>		
1	TY 14 - 1 - 3023 - 80	— 480×12 ♂ 190	24	206.20 კგ
2	TY 14 - 1 - 3023 - 80	— 240×8 ♂ 190	24	68.72 კგ
3	TY 14 - 1 - 3023 - 80	— 220×30 ♂ 190	24	236.25 კგ
4	TY 14 - 1 - 3023 - 80	— 580×16 ♂ 220	8	128.22 კგ
5	TY 14 - 1 - 3023 - 80	— 340×8 ♂ 220	8	37.58 კგ
6	TY 14 - 1 - 3023 - 80	— 220×30 ♂ 220	8	91.19 კგ
7	TY 14 - 1 - 3023 - 80	L 100×100×8 ♂ 220	48	129.36 კგ
8	TY 14 - 1 - 3023 - 80	L 100×100×8 ♂ 150	56	102.90 კგ
9	TY 14 - 1 - 3023 - 80	∅ 16 ჭანჭიკი ♂ 250	260	
		Σ =	1000.41	კგ

				G 02	შპს
				პარკირების შენობა	სტატია
					ფურც.
					ფურცლები
დირექტორი	ბ. აბულაძე				მ
პრ. მთ. არკ.	ბ. კეხიშვილი				9
შეასრულა	ნ. თევდორაშვილი	ფიზიკ.		ლითონის შეაკრავი კოჭების კვანძები	
შეამოწმა	ბ. ჯუღაშვილი				

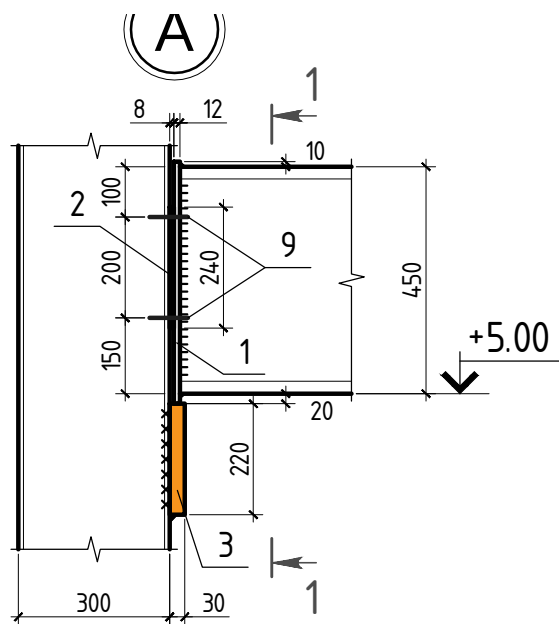