

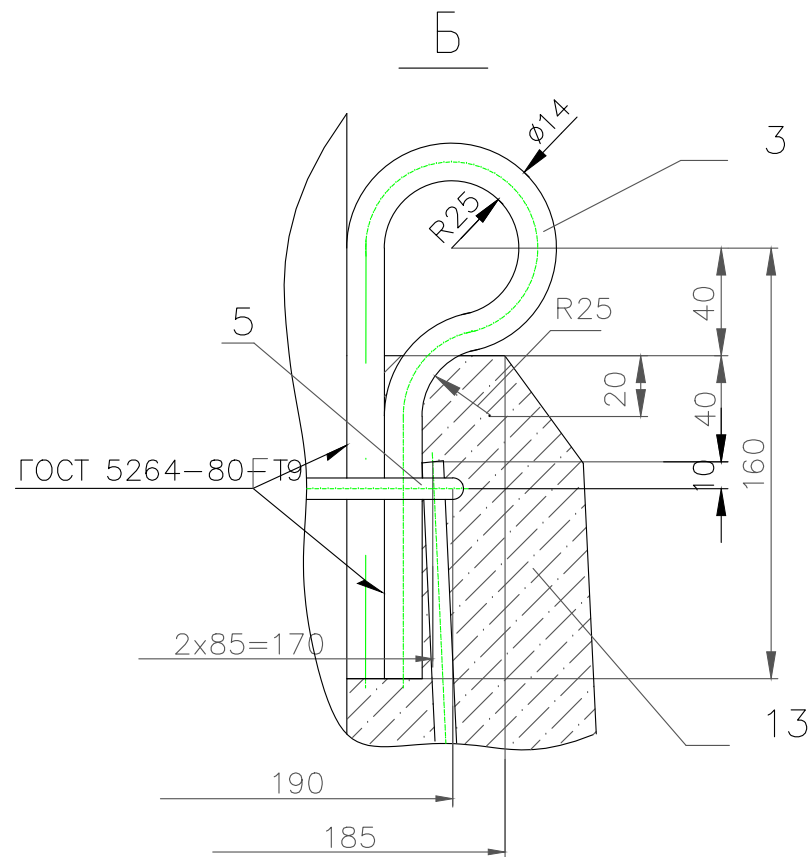
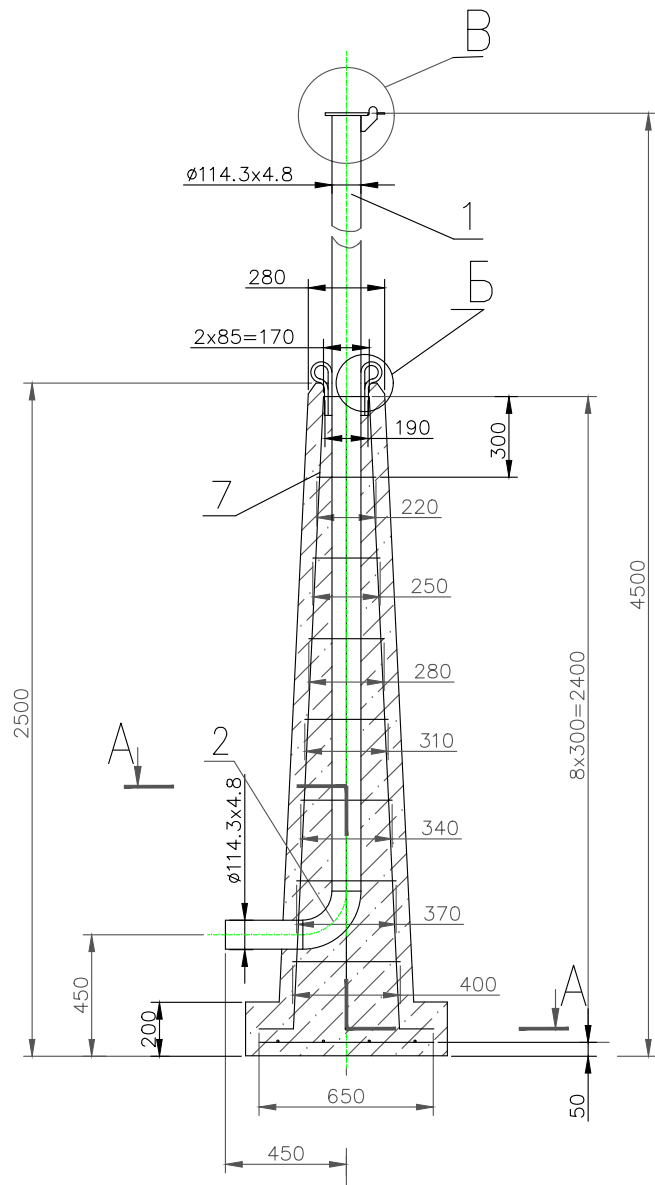
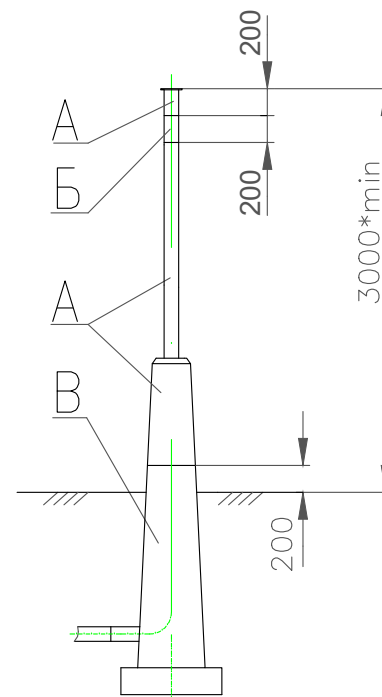


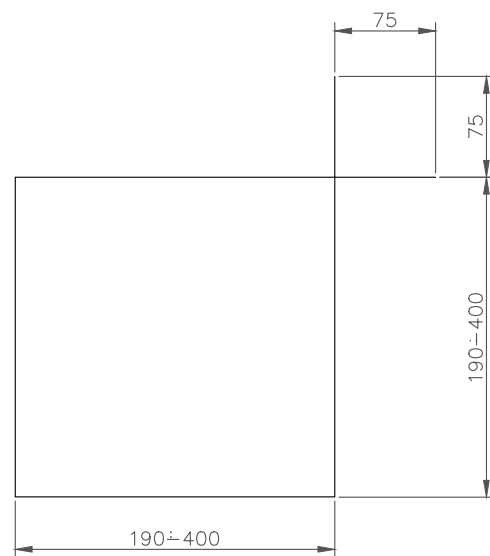

Candle instalation scheme

Collar, pos. 5

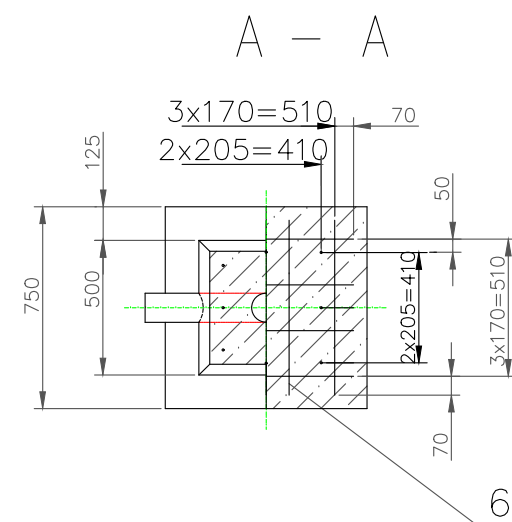

Pos.	Indication (code)	Title	Quantity	Unit	Note
1	API 5L	Pipe 114.3x4.8 (x52)	meter	5	12.7
2	ASME B16-9/ MSS SP-75	Bend П 90 – 114.3x6.4	unit	1	3.8
3		Ring connector LMB==440 mm Ring 14-B ГОСТ 2590-2006 СТЗСП- 11 ГОСТ 535 - 2005	unit meter	2 0.88	1.21
4		Stem L _{MB} =85 mm Ring 14-B ГОСТ 2590-2006 CT3 СП 12 ГОСТ 535 - 2005	meter	0.085	0.21
5	ГОСТ 5781-82*	Collar Steel 8-A-I (A240)	unit meter	8 11	0.395
6	ГОСТ 5781-82*	Stem L _{MB} =650 mm Steel 8-A-III (A400)	unit meter	8 5.2	0.395
7	ГОСТ 5781-82*	Stem L _{MB} =2520 mm Steel 8-A-III (A400)	unit meter	8 20.16	0.395
8		Disk Sheet 20. ГОСТ 19903-74* 20-3 ГОСТ 1577-93*	unit m ²	1 0.01	157
9		Root Sheet Б-ПН-5 ГОСТ 19903-74* СТЗКП ГОСТ 14637-89	unit m ²	1 0.04	39.2
10		Eye Sheet Б-ПН-5 ГОСТ 19903-74* СТЗКП ГОСТ 14637-89*	unit m ²	2 0.007	39.2
11		Support Sheet Б-ПН-5 ГОСТ 19903-74* СТЗКП ГОСТ 14637-89 (72X34) 88	unit m ²	1 0.003	39.2
12	ГОСТ 7338-90*	Rubber padding: plate 1 sheet МБС-М1-5Х 600x800	unit m ²	1 0.015	2.88
13		Concrete heavy mark B15 СНП 2.03.01-84*	m ³	0.97	2500
14	ГОСТ 7798-70*	Nut M10x30.58.096	unit	1	0.031

- The figure shows the height of the land above the candle was delivered
- Pipe and bend (pos.1 and 2) prior to connecting around candle stem area shell be covered with raintxcd coating.
- Surface A shell be covered with yellow oil paint twice, Surface Б - with red oil paint twice, Surface B - with bitumen.

Approved by	A. Dekanosidze		 საქართველოს ნავთობისა და გაზის კორპორაცია Georgian Oil & Gas Corporation	East - West Gas Main Pipeline Kobuleti Branch	
Checked by	T. Javakhishvili			Venting candle DN 100 Pp 5.4 MPa. General view, cross section	
Designed by	T. Mrevlishvili			DCC NUMBER: K0BU60-GW05-PL-DTL-00015	
Drawn by	A. Farii			SHEET No. 1(2)	
REV.	C01		SCALE:	No:	REV. C01
01/08/20/DATE	06/07/15		PAPER SIZE: ISO A3		